



Air Inlet



Name: Air Inlet
Size: 650-800-1500

INCOOL's Air inlets are made of rigid polyurethane foam with hard and smooth surface. It's light and easy to install. It can ensure a high level of tightness, resistant to chemicals, aggressive gases and dry rot.

Unlike conventional metal inlets that allow cold air to drop prematurely, INCOOL's air inlets have a distinctive aerodynamic door design to bring air into your house toward the peak to effectively mix the air.

FEATURES:


INCOOL's air inlet directs fresh air upward and speeds it to the center of the house—ideal for wide buildings.

During operation, airflow is directed through the inlet's opening rather than leaking out at bottom and sides.

Curved inlet maintains greater air velocity further than conventional inlets—in fact, air velocity is 50% greater 20 feet from the inlet.

DURABLE AND PROVEN:

- Solid, P.U. construction will not rust or corrode; also rodent resistant.
- Hollow door insulates against sweating.
- Sealed against air leakage.
- Reduced maintenance costs.
- Manual door latches secure door when not in use.
- Corrosion resistant.
- Shipped fully assembled and ready to install.
- Tested and proven, from many years.
- Exterior wind deflector recommended to optimize inlet performance and protection.

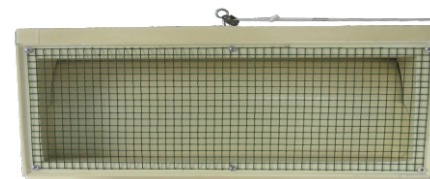

CopyRight ©2017. Topcool Ventilation Equipment Co. , Ltd. All Rights Reserved



TOPCOOL VENTILATION EQUIPMENT CO., LTD.


Tel : 0086-757-88861830 website : www.topcool.co

Fax : 0086-757-88861828 E-mail : info@topcool.co





FEATURE POINTS

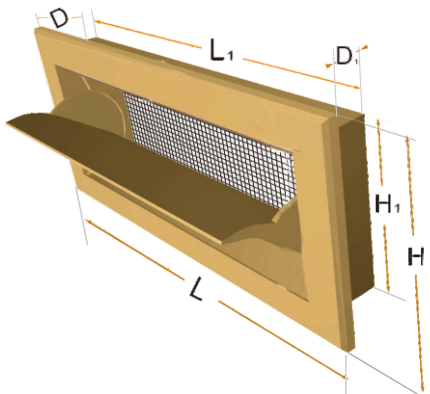						
Model	L ₁	D ₁	H ₁	L	D	H
SA-650	650	270	100	730	350	125
SA-800	800	400	125	880	480	145
SA-1500	1500	400	140	1580	480	160

PICTURE APPLICATION



*Picture for reference only.

CONFIGURATIONS & PERFORMANCE DATA

Topcool PN	Description	Specification	Dimension (L×H×D)	RSO (L×H)	Airflow (10Pa/25Pa)	Container Loading Qty (20'GP/40'GP)
SA-650	Wall air inlet	PU	730×350×125 mm	650×270 mm	1450m ³ /hour 2150m ³ /hour	910sets/1820sets
SA-800	Wall air inlet	PU	880×480×145 mm	800×400 mm	2520m ³ /hour /4265m ³ /hour	420 sets/840sets
SA-1500	Wall air inlet	PU	1580×480×160mm	1500×400 mm	5800m ³ /hour /8750m ³ /hour	210 sets/420sets

The products show in this brochure are covered by a limited warranty.
Due to our continual effort to provide better products and service; literature, products, performance data, prices and availability are subject to change without notice.

Additional information is available at www.topcool.co

CopyRight © 2017 .Topcool Ventilation Equipment Co., Ltd . All Rights Reserved

